

# Digital Print Media for Eco-Solvent, Solvent, Latex & UV Curable Inkjet



SERIES	PRODUCT DESCRIPTION	PART #	Roll size	Roll Price	Sq. Ft.	Adhesive	Ink type
TRANSIT	209 MetroMark 3.5 mil - Matte White Opaque "Transit" Vinyl Clear Removable Adhesive 90# Layflat "Printed Logo Liner" / <b>Approved</b>	209-54 209-64	54"x150' 64"x150'	292.00 341.00	.44 .43		
	275 NEW SubMark 3.5 mil - Matte White Opaque "Transit" Vinyl Clear High-Tack Adhesive 90# Layflat "Printed Logo Liner" <b>Approved</b>	275-54 275-60 275-62	54"x150' 60"x150' 62"x150'	494.00 498.00 490.00	.73 .66 .64		
	228 TransMark 6.0 mil - Matte White Translucent Vinyl - 2yr Clear Removable Adhesive 90# Layflat Liner <b>Taxi Top Approved</b>	228-54 228-60	54"x100' 60"x100'	522.00 580.00	1.15 1.15		
FLOOR & CARPET	210 Traffic Graphic 3.4 mil - Matte White "Floor Advertising" Vinyl Clear Removable Adhesive 90# Layflat Liner	210-54	54"x150'	304.00	.45		
	212 Traffic Graphic 3.4 mil - Matte White "Carpet Advertising" Vinyl Clear High-Tack Removable Adhesive 90# Layflat Liner	212-54	54"x150'	304.00	.45		
	*211 Traffic Graphic 6.0 mil - Gloss Clear Laminate Clear Permanent Adhesive 53# Liner *  TRAFFIC GRAFFIC CLASSIFIED BY UNDERWRITERS LAB RATORIES, INC.® AS TO SLIP RESISTANCE ONLY 4R93	*211-54	54"x150'	437.00	.65		
	*109 Traffic Graphic 5.0 mil - Scratch Resistant Textured Laminate Clear Permanent Adhesive 1.5 mil Clear Polyester Liner TRAFFIC GRAFFIC CLASSIFIED BY UNDERWRITERS LABORATORIES, INC.® AS TO SLIP RESISTANCE ONLY 4R93	*109-51 *109-54	51"x150' 54"x150'	468.00 492.00	.74 .74		
TRANSLUCENTS	224 TransMark 3.2 mil - Matte White Translucent Vinyl - 5yr Clear Permanent Adhesive 90# Layflat Liner	224-54 224-60	54"x150' 60"x150'	632.00 702.00	.93 .93		
	225 TransMark 3.2 mil - Matte White Translucent Vinyl - 2yr Clear Removable Adhesive 90# Layflat Liner	225-54 225-60	54"x150' 60"x150'	656.00 729.00	.98 .98		
	228 TransMark 6.0 mil - Matte White Translucent Vinyl - 2yr Clear Removable Adhesive 90# Layflat Liner <b>Taxi Top Approved</b>	228-54 228-60	54"x100' 60"x100'	522.00 580.00	1.15 1.15		
WALLS	252 WallTux 6.0 mil - Matte White Woven Polyester Wall Fabric with added opacity. Removable-Repotionable Clear Wall Adhesive. - <a href="#">click here for info and specs.</a>	252-54 252-60	54"x100' 60"x100'	513.00 571.00	1.13 1.13		
	229 NEW WallMark CANVAS 6.0 mil - Matte White Embossed Canvas Wall Vinyl Clear Low Tack Adhesive - 90# Tight Release Liner - <a href="#">click here for info and specs.</a>	229-54 229-60	54"x100' 60"x100'	395.00 439.00	.88 .88		
	226 WallMark 6.0 mil - Matte White Semi-Rigid Wall Vinyl Clear Low-Tack Microsphere Beaded Adhesive 90# Tight Release Liner	226-54	54"x100'	322.00	.71		
	234 GraphiTex 7.0 mil - Matte White Polyester Wall Fabric Film Clear Low-Tack Wall Adhesive 90# Layflat Liner	234-54 234-60	54"x100' 60"x100'	551.00 612.00	1.23 1.23		
	250 NEW WALLFROG 4.0 mil - Matte White Polyester Wall Fabric Film Clear Low-Tack Wall Adhesive 90# Layflat Liner	250-54	54"x100'	468.00	1.04		
285 NEW ROUGHMARK 3.5 mil - Matte White Opaque Vinyl Clear High-Tack Solvent Removable Adhesive 90# Layflat Liner <a href="#">click here for sales sheet &amp; specs.</a>	285-54	54"x75'	350.00	1.04			

## wallNOODLE<sup>™</sup>

SHORT TERM WALL MEDIA



Application: Wall Graphics  
Material: wallNOODLE<sup>™</sup>



**WN628** is a 6.0-mil matte white, semi-rigid calendered PVC film designed for UV screen, and solvent-based ink jet printing. The product is coated on one side with a removable and repositionable acrylic pressure sensitive adhesive and supplied with a 90# SuperFlat<sup>™</sup> liner. WN628 is designed for short term (6 months to one year) indoor wall graphics on smooth, flat surfaces.

### Features and Benefits:

- 6.0-Mil matte white semi-rigid facestock
- Easily applied and removed from most interior wall surfaces
- Reusable
- Matte facestock provides superior printability
- Available on 6" cores

### Typical Uses:

- Short term (six months to one year) indoor wall graphics
- Designed for smooth, flat surfaces

[CLICK HERE FOR MATERIAL SPECS AND PRODUCT APPLICATION](#)

Physical Properties	Typical Values
<b>Peel Adhesion</b> , lb./in. (N/25 mm) 180° on Stainless Steel - 24 hr	<b>0.85</b>
<b>Quick Tack on SS</b> , lb./in <sup>2</sup> (N/25mm)	<b>0.80</b>
<b>Dimensional Stability (shrinkage)</b> , % 48 hours @ 158°F (70°C)	MD <b>0.40</b> CD <b>0.20</b>
<b>Temperature Ranges</b> Minimum Application: End Use:	<b>50°F (+10°C)</b> <b>-20° to 158°F</b> (-6° to 70°C)
<b>Shelf Life:</b>	Two years from D.O.M when stored at 60/77°F (15-25°C) and 50% relative humidity in the original packaging.

### PRICE

Size: 54" x 100 Ft. 355.00 per Roll (.76 sq. ft.)

## ROODLE<sup>™</sup>



Application: Wall Graphics  
Material: ROODLE<sup>™</sup>



**ROODLE<sup>™</sup> RO628** is a 6 mil matte white vinyl designed for solvent, eco-solvent, latex, and UV wide format, as well as for screen printing. Designed for tileable wall graphics, posters, decals and bumper stickers, RO628 is supplied on a 90# SuperFlat<sup>™</sup> polycoated release liner for moisture stability regardless of print method.

### Features and Benefits:

- ROODLE meets the flame spread and smoke density specifications for ANSI/NFPA – Class A and IBC – Class A.
- Thick face makes ROODLE easy to install, even without a laminate
- Removable for up to 2 years from most well maintained substrates

### Typical Uses:

- Wall murals
- Decals
- Point of purchase displays

### Use with:

- PERMACOLOR<sup>®</sup> ColorGard<sup>™</sup> CG8000 Series
- PG7000 Series

[click here for material specs and product application](#)

Physical Properties	Typical Values
<b>Peel Adhesion</b> , lb./in. (N/25 mm) 180° on Stainless Steel - 24 hr	<b>1.5</b>
<b>Quick Tack on SS</b> , lb./in <sup>2</sup> (N/25mm)	<b>2.1</b>
<b>Dimensional Stability (shrinkage)</b> , % 48 hours @ 158°F (70°C)	<b>.04</b>
<b>Temperature Ranges</b> Minimum Application: End Use:	<b>50°F (+10°C)</b> <b>-20° to 158°F</b> (-6° to 70°C)
<b>Shelf Life:</b>	Two years from D.O.M when stored at 60/77°F (15-25°C) and 50% relative humidity in the original packaging.

### PRICE

Size: 54" x 100 Ft. 319.00 per roll (.71 sq. ft.)



## Intermediate - Solvent-based, UV Cured Ink Jet Media

### StreetRap™

CONCRETE FLOOR GRAPHICS



**Application:** Concrete Graphic  
**Material:** StreetRap



**StreetRap** is a 3.2-mil matte white vinyl with an aggressive high tack adhesive. It's designed for short term application to unsealed, indoor or outdoor, pedestrian concrete or asphalt surfaces or selected smooth to slightly rough wall surfaces.

#### Features and Benefits:

- Great adhesion to unsealed concrete or asphalt surfaces
- Eco-solvent, solvent, UV ink jet and screen printable
- Matte facestock provides superior printability

#### Typical Uses:

- Retail outlets
- Trade shows
- Sports venues
- Convention Centers
- Parades

**Note:** Must be overlaminated. Use Permacolor IP6200 Series.

Physical Properties	Typical Values
<b>Peel Adhesion, lb./in. (N/25 mm)</b> 180° on Stainless Steel - 30 min - 24 min - 3 days	7.0 8.0
<b>Quick Tack on SS, lb./in<sup>2</sup> (N/25mm)</b>	7.5
<b>Dimensional Stability (shrinkage), %</b> 48 hours @ 158°F (70°C)	max 0.5
<b>Temperature Ranges</b> Minimum Application: End Use:	50°F (+10°C) -50° to 225°F (-45° to 107°C)
<b>Shelf Life:</b> Two years from D.O.M when stored at 60/77°F (15/25°C) and 50% relative humidity in the original packaging.	

#### StreetRap PRICE

Item	Size	Price per roll	Sq. Ft.
STR328L100	54" x 100 ft.	741.00	1.58

Laminate: - IP 6202 slip resistant 5mil textured lustre finish - polycarbonate - 51"x 150ft. - 1079.00 (1.70sq)

## High-Performance - Solvent-based, UV Cured Ink Jet Media

### RoughRAP™

WALL WRAP GRAPHICS



**Application:** Wall Graphics  
**Material:** IMAGin® Digital Media for Wall Wraps



**WW100** is a 2.1-mil soft white gloss, highly conformable PVC film designed for solvent-based ink jet printing. The product is coated on one side with a high tack, permanent, opaque acrylic adhesive. WW100 is specifically designed for direct application onto exterior and interior brick walls for an astonishing visual effect! Use of an overlaminate will extend the life of the graphic and allow for easier handling during installation.

#### Features and Benefits:

- 2.1-mil highly conformable vinyl face
- High tack, permanent adhesive
- 80# polycoated liner for excellent printability and layflat
- Superior print quality for vibrant images

#### Typical Uses:

- Exterior and Interior Brick walls

#### Use with:

- PERMACOLOR® RAYZor™ - page 25

Physical Properties	Typical Values
<b>Peel Adhesion, lb./in. (N/25 mm)</b> 180° on Stainless Steel - 24 min	3.2-5.0 (14-22)
<b>Quick Tack on SS, lb./in<sup>2</sup> (N/25mm)</b>	4.8-6.2 (21-27)
<b>Dimensional Stability (shrinkage), %</b> 48 hours @ 158°F (70°C)	max 0.5
<b>Temperature Ranges</b> Minimum Application: End Use:	50°F (+10°C) -4° to 160°F (-20° to 70°C)
<b>Shelf Life:</b> Two years from D.O.M when stored at 60/77°F (15-25°C) and 50% relative humidity in the original packaging.	

#### PRICE

Size: - 54" x 75 ft.	- 565.00 per roll	(1.67 sq. ft.)
54" x 150 ft.	- 1110.00 per roll	(1.64 sq. ft.)



**Application:** Wall Graphics  
**Material:** IMAGin® Digital Media for Wall Wraps

[CLICK HERE FOR PRODUCT INFO & SPECS.](#)



# WALL MEDIA PRODUCTS

## Seal SolvoPrint™ WallGrip


SolvoPrint™ WallGrip is the go-to product for all your indoor wall graphic projects. Easy to handle and install, WallGrip features a 6 mil polymeric vinyl with a specialty removable adhesive, designed for clean removal without residue or damage to walls. WallGrip's specialty adhesive even works when printed to the edge, or when no border is left upon cutting. Use this product for signage, retail displays, murals and trade show graphics.



Item # 62907 - Roll Size: 54" x 150 ft. - 450.00 (.68 sq. ft.)  
 Item # 62908 - Roll Size: - 27" x 23 ft. (introductory roll) - 66.00

WallGrip Technical Specifications

WallGrip Application Guide

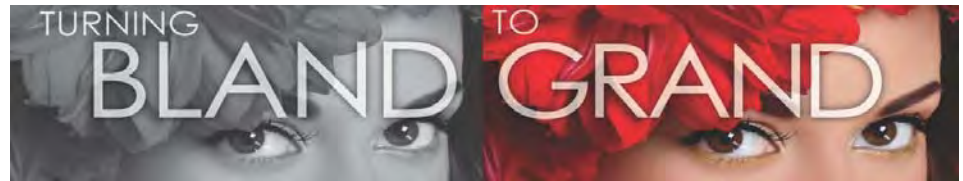

## Pure Nature Giotto Wall Mural

**Giotto Wall Mural** is a bright white paper wall covering product for latex and uv curable printers. Prepasted with a water activated adhesive. It is easy to install and remove from walls. A great alternative to self adhesive vinyl. It has a variety of applications and is the perfect eco-friendly option for murals, wall decor and p.o.p. signage.

9.6 mil thickness - 98% opacity - ASTM E-84 Class A fire rating.

Item No.	Roll Size	Price	Sq. Ft. price
6073109	54" x 150 ft.	420.00	0.62
6073108	30" x 23 ft. (introductory)	40.35	-